

4000 Series


Single Color Light Engine



90+ CRI White Single Bin

| | |
|---|-------|
|  | 2150K |
|  | 2350K |
|  | 2550K |
|  | 2650K |
|  | 2950K |
|  | 3450K |
|  | 3950K |

Colors

| | | | |
|--|------|---|-------|
|  | Red |  | Amber |
|  | Blue |  | Green |



- 90+ CRI
- UL Class 2
- IP20 Dry Location
- Custom Cut to Fit
- 50,000 Hour Min. Lifespan

Requires: Aion LED Driver, Approved Controller, Aion LED Housing. Sold Separately, Not Included

80+ CRI Available via Special Order

Tested as suitable for use within clothing closet spaces by ETL/Intertek

Must be installed in accordance with NEC 410.16 for use in clothing closet spaces



Components of a complete system include: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

4924-LE

Mid Output



90+CRI


2.8W /ft.

≤ 236 Lm/ft.

RANGE BY CCT (X-Y)

Max. Increment:
30 ft.

Min. Increment:
2 in.

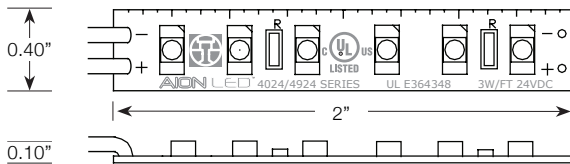

4924-22-LE 4924-24-LE 4924-26-LE 4924-27-LE 4924-30-LE 4924-35-LE 4924-40-LE

| | 4924-22-LE | 4924-24-LE | 4924-26-LE | 4924-27-LE | 4924-30-LE | 4924-35-LE | 4924-40-LE |
|------------------------------|------------|------------|------------|------------|------------|------------|------------|
| TOTAL LUMENS | 126.64 | 193.43 | 190.98 | 165.23 | 206.60 | 222.05 | 225.43 |
| INPUT POWER (W) | 2.26 | 2.82 | 2.83 | 2.19 | 2.61 | 2.65 | 2.81 |
| EFFICACY | 56.80 | 69 | 68 | 76 | 79 | 84 | 80 |
| COLOR RENDERING INDEX (CRI) | 94 | 91 | 97 | 92 | 92 | 92 | |
| R9 | 71.30 | 52.71 | 83.61 | 66.04 | 68.06 | 69.25 | |
| INPUT VOLTAGE (VDC) | 24 | 24 | 24 | 24 | 24 | 24 | 24 |
| INPUT CURRENT (AMP) | 0.09 | 0.12 | 0.12 | 0.09 | 0.11 | 0.11 | 0.12 |
| CORRELATED COLOR TEMPERATURE | 2150K | 2400K | 2550K | 2700K | 2950K | 3450K | 3950K |



Components of a complete system include: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.



AIONLED.COM | (415) 255-AION

Modified: March 14, 2018

© 2018 Aion LED. All Rights Reserved