


6524-CT3022-LE
 Dynamic White Light Engine
 High Output

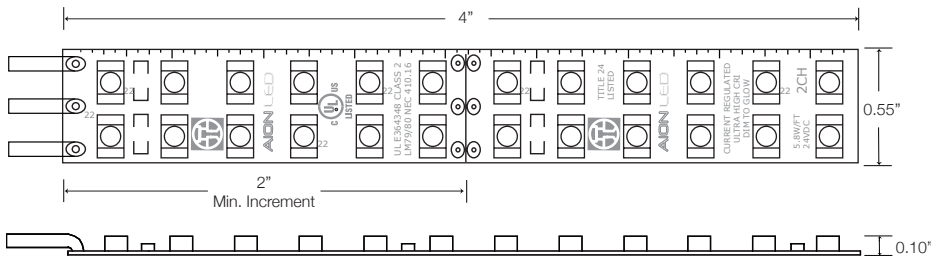

2 Channel Fixture:
 CH 1: ~5.6W/ft.
 CH 2: ~5.6W/ft.
 TOTAL: 11.04 W/ft.

Minimum Increment:
 2 in.

Maximum Increment:
 8ft.
 -or-
 16 ft. when utilizing Aion LED Dynamic Tuner Module

	COMBINED	WARM	COOL
Correlated Color Temperature	2550K	2150K	2950K
Lumens /ft.	885	405.35	490
Watts /ft.	11.04	5.60	5.61
Efficacy	80	72	87
Color Rendering Index	96	95	98
R9	97.60	96.13	97.89
Input Voltage (VDC)	24.00	24.00	24.00
Input Current (Amp)	0.46	0.23	0.23



REQUIRES D100-X2 DRIVER, DMX CONTROLLER AND 800-SERIES HOUSING Sold Separately, Not Included

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only; does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.