


PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

1524-CT3022-LE
Dynamic White Light Engine
Mid Output

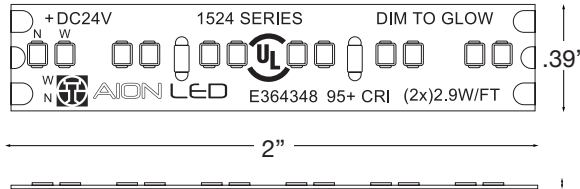

2 Channel Fixture:
CH 1: 3000K ~2.8W/ft.
CH 2: 2150K ~2.8W/ft.
TOTAL: 5.61 W/ft.

Min. Increment:

2 in.

Maximum Increment:

15ft.
-or-
30 ft. when utilizing Aion LED Dynamic Tuner Module

	COMBINED	WARM	COOL
Correlated Color Temperature	2519K	2150K	2950K
Lumens /ft.	386.95	174	220.33
Watts /ft.	5.61	2.87	2.86
Efficacy	69	61	77
Color Rendering Index	97	96	98
R9	94.39	87.55	95.63
Input Voltage (VDC)	24.00	24.00	24.00
Input Current (Amp)	0.23	0.12	0.12



REQUIRES D100-X2 DRIVER, DMX CONTROLLER AND AION LED HOUSING Sold Separately, Not Included

PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.



AIONLED.COM | (415) 255-AION

Modified: January 25, 2018

© 2017 Aion LED. All Rights Reserved